

ADDITIONAL INFORMATION

SECONDARY POWER SUPPLY

The XTLtouch's 800 mAh rechargeable standby battery is used to provide four hours of battery power when DC power is not available. The battery is intended for back power only and should not operate the panel on a daily basis.

If the battery is low or not plugged into the battery connector, a low battery condition is indicated by the panel. If a 24 hour standby battery is needed, connect a 4800 mAh battery.

Replace the Battery

1. Remove the backplate from the XTLtouch.
2. Unplug the battery and remove it from the base.
3. Place the new battery in the same location and secure it with the included adhesive. See Figure 9.
4. Plug in the new battery.
5. Replace the backplate.

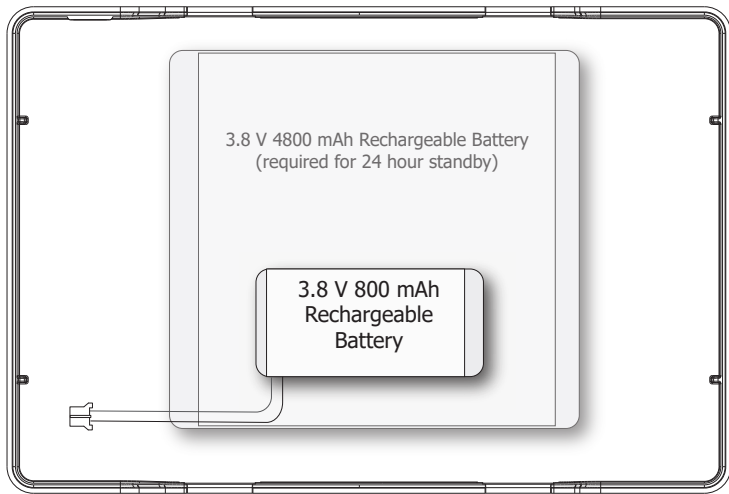


Figure 9: Replacing the Battery